




Begin by disconnecting adjustment strap (shown in light gray) from slide, via zipper above pocket.

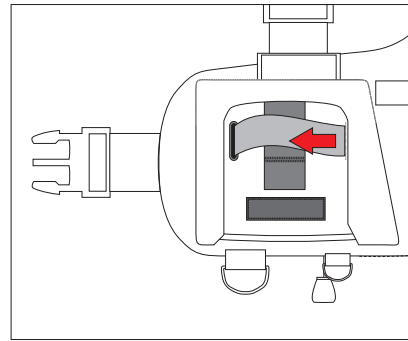


Once adjustment-strap is completely disconnected from slide, Pull loose side of strap out of slit as shown above.

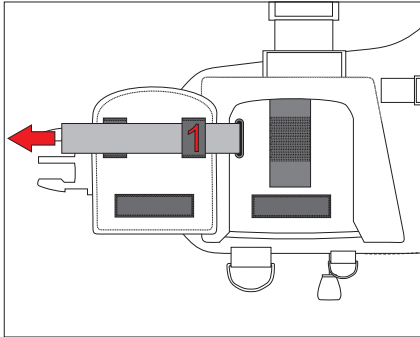


Take strap and weave through loop shown on back of pocket, shown above with #1.

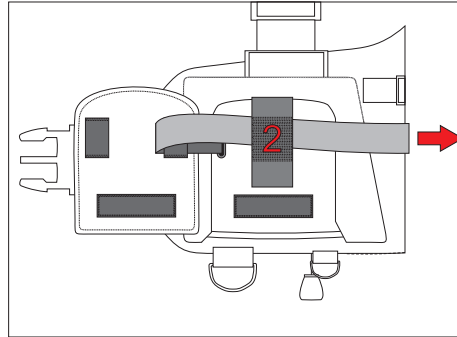


Next, reverse strap and weave through middle loop on BC, shown above with #2.

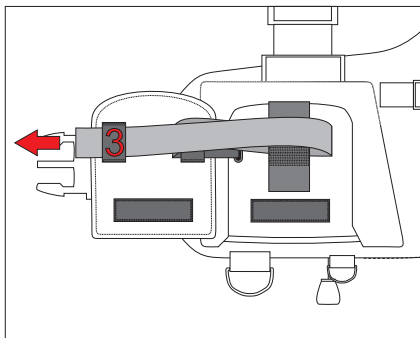


Again, reverse strap and weave through remaining loop on back of pocket, shown above with #3.

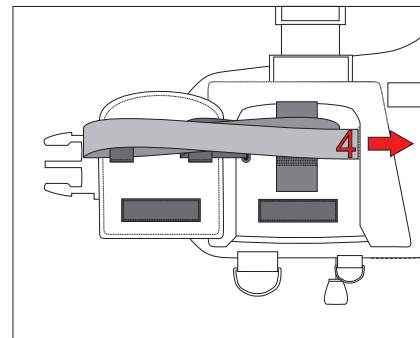

Reverse strap one final time and insert back into slit on BC, shown above with #4.

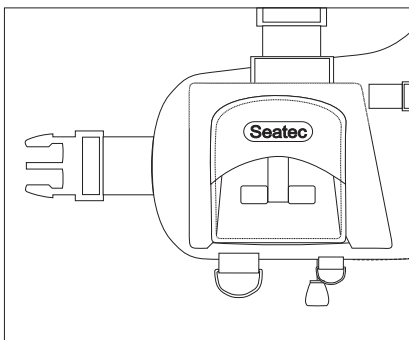


Pull tight and re-insert adjustment strap into slide via zipper above pocket to secure.

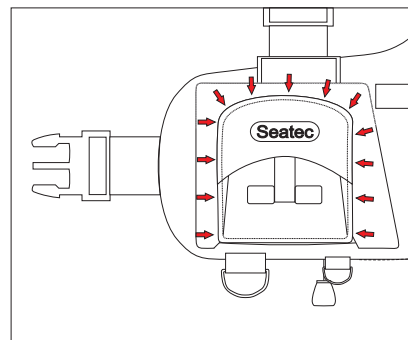


Finally, use fingers to pull the sides of the BC over the edges of the pocket and close zipper above pocket.


*Repeat for both pockets

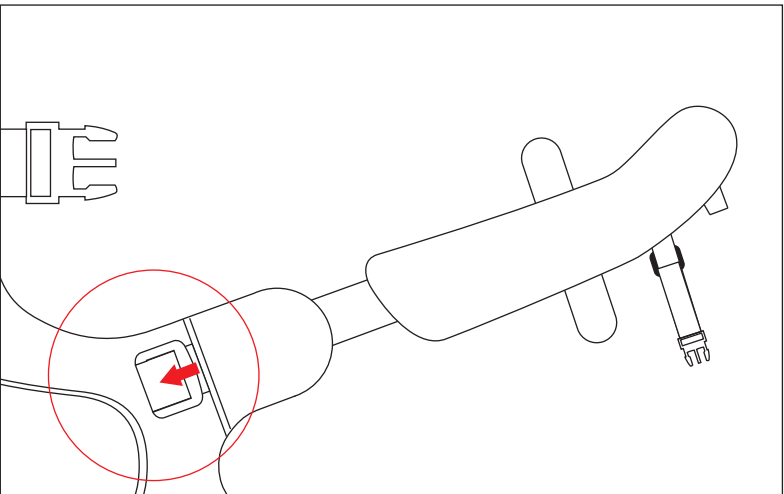


Pull loose end of strap out of BC's shoulder padding.

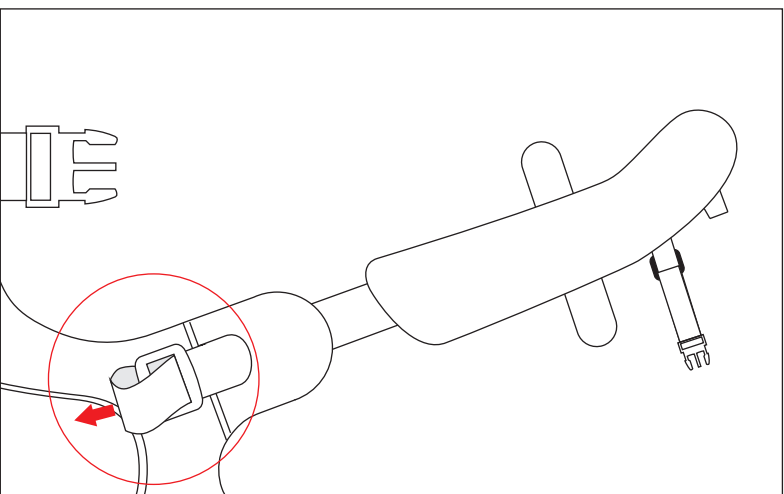


Unlock shoulder-adjustment strap by removing end from top of slide.

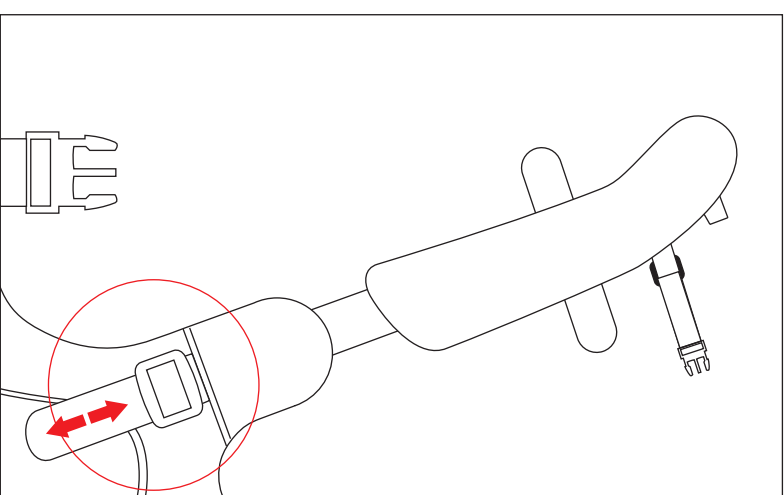


Adjust as needed and reverse steps 2 and 1 to return strap to ready to use position.

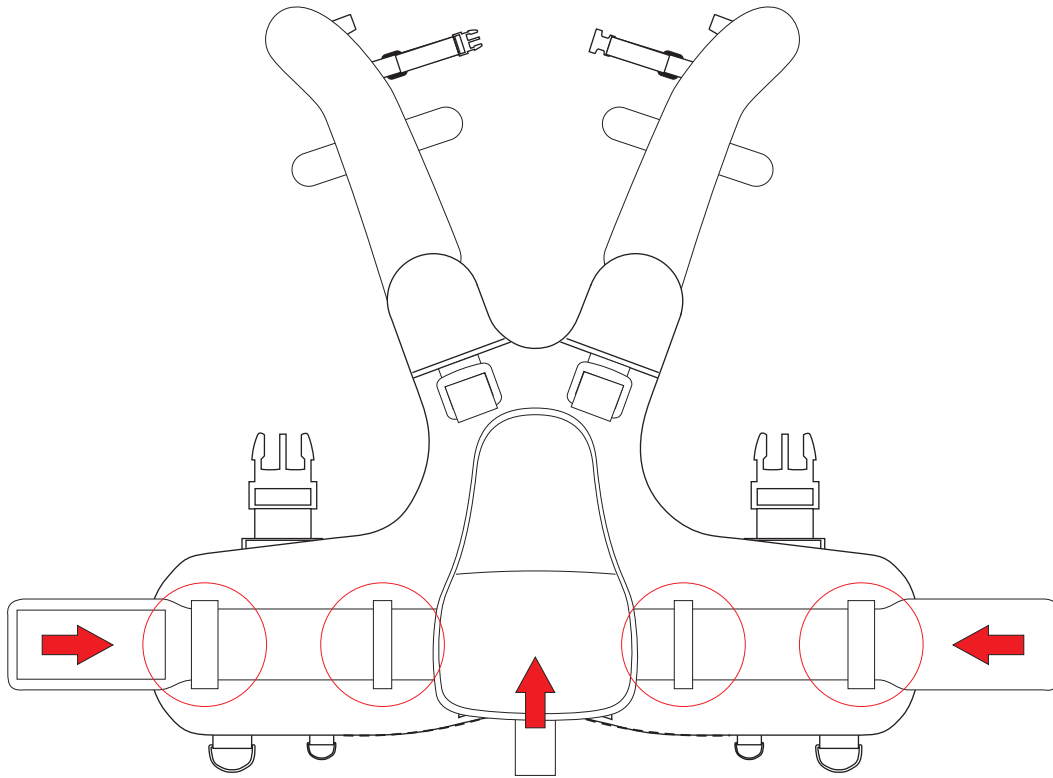

Remove cumber-bun system by removing elastic straps from loops on inside of BC. Once straps have been removed from loops, pull up from bottom to disconnect from velcro. Once velcro is disconnected, remove velcro loop from top of cumber-bun to disconnect completely.

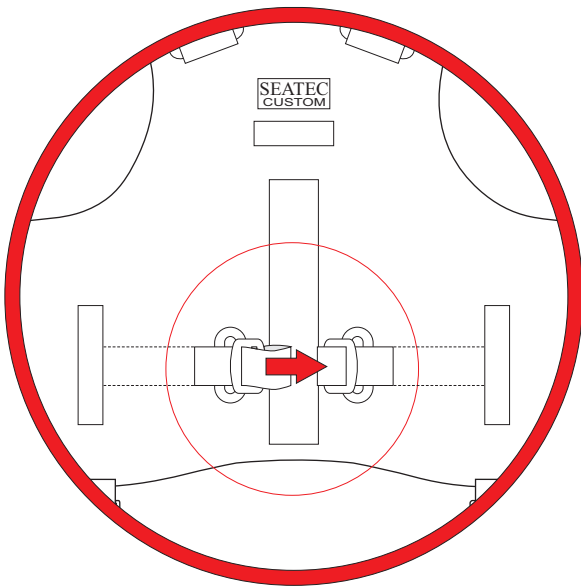

Once cumber-bun system has been removed, unlock adjustment-strap by removing end from adjustment slide.

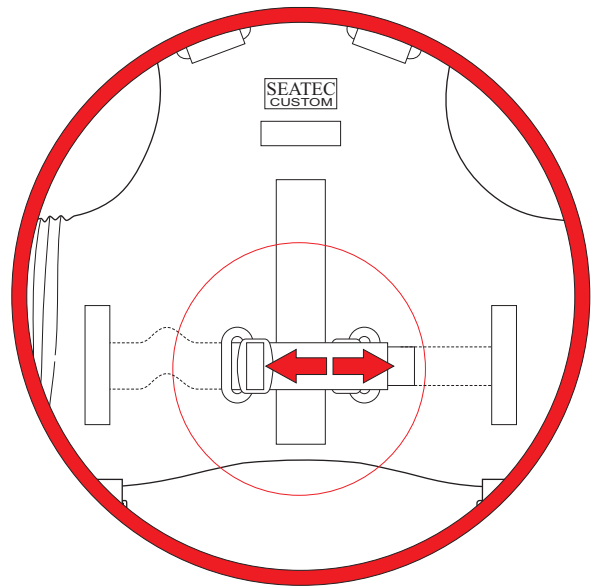

After unlocking adjustment slide, adjust waist as needed (repeat on opposite side). Reverse step 2 to lock adjustment. Replace cumber-bun system by reversing steps in FIGURE 1 to return BC to ready to use position.